

ALL-TEST PRO® - FOR GREATLY INCREASED PRODUCTIVITY!



The ALL-SAFE PRO® is a permanently installed connection system that offers significant advantages over conventional monitoring and measuring of power and motor systems.

Manufactured in the USA and conforming to UL STD 61010-1:2004, it is certified to CAN/CSA C22.2 number 61010-1:2004 and complies with the CE requirements for a rated input of 1000V, measurement category III. For motors or generators over 1000V it can be connected via potential transformers and current transformers.


The ALL-SAFE PRO® provides the signals necessary to determine the condition of the complete motor system with a minimum of risk, error and trouble. No need to suit up in bulky protection gear. Test set up is fast and the number of tests performed in a day is almost unlimited. The actual sampling takes about one minute. In addition, using the ALL-SAFE PRO® will eliminate connection errors.


Installation is very easy and no special tools are needed. Each installation can be completed in about one hour.

SAFE, EASY, & RELIABLE

There is no need to open the ALL-SAFE PRO® or the Control Panel door to gather data. The output pins are deactivated when not in use to prevent exposure to dangerous voltage. Voltages representing the flow of current are less than 2V on the exposed connector. Shorting of any of the contacts of the exposed connector will not result in damage or voltage exposure.

The ALL-SAFE PRO® is available for most applications and priced to guarantee a quick return on investment.

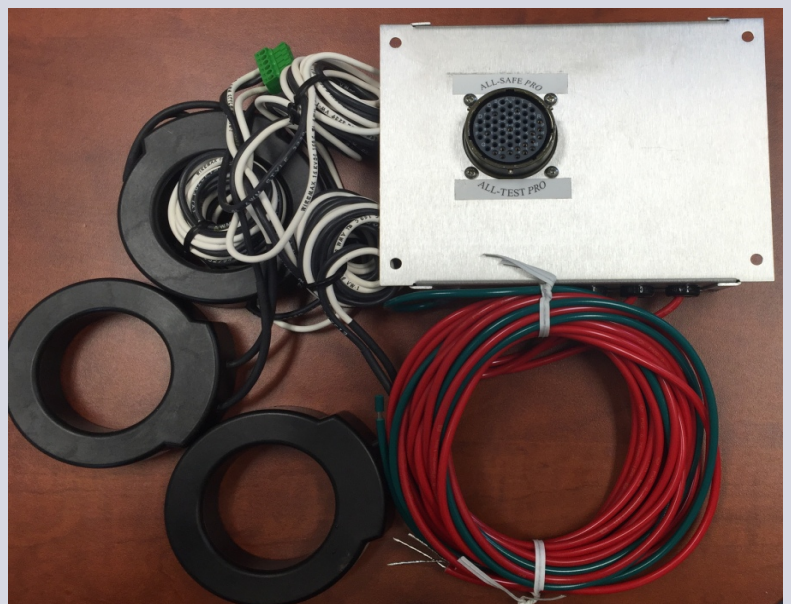

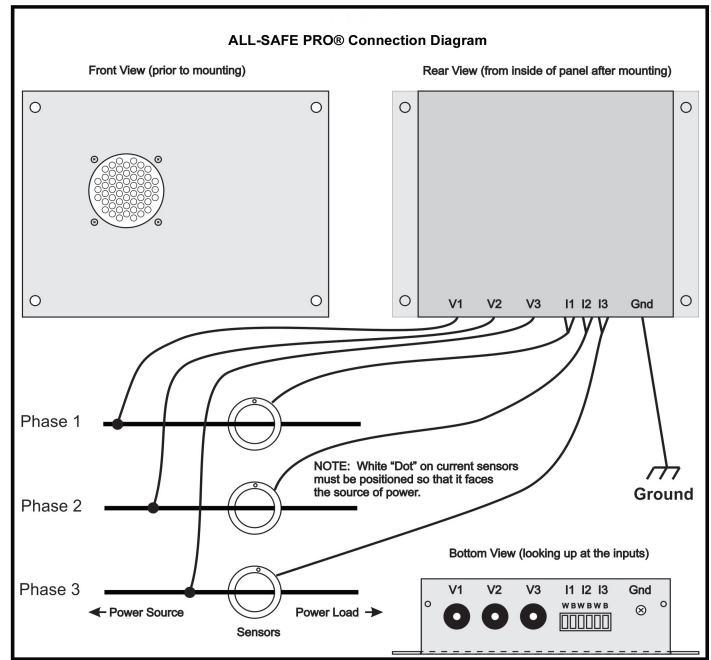

Technical Specifications

Size (Enclosure-excludes dimensions of connection port to ATPOL II)

6" Wide x 4 3/4" High x 1 5/8" Deep
(153mm x 120mm x 41mm)

Weight (Enclosure Only-No Sensors)

0.8 lbs (0.4kg)

Operating Range

0 - 50 degrees C (32 - 122 degrees F)
Relative humidity to 70% (non-condensing)

Power Requirement

Nominal power is supplied by attached ATPOL

Input Voltage

Input Range: 1 - 1000V steady-state
(direct input)

Output Voltage

<5V when not connected to ALL-SAFE PRO®

Adapter

Accuracy: No distortion of the original voltage when connected to ATPOL

Frequency Response: No de-rating of accuracy for harmonics or transients

Input Current

Sensors convert to voltage <2V prior to entry into ALL-SAFE PRO®

Current capacity dependent on current sensor ordered

Output Current Measurement

Accuracy: accuracy of probe

Frequency Response: dependent on current probe attached no de-rating of accuracy for harmonics through 1500 Hz

Frequency

Range: 22 - 66 Hz fundamental frequency

Safety

CE for a 1000V cat III, pollution degree II, basic insulated

Conforms to UL STD 61010-1:2004

Certified to CAN/CSA C22.2 number 61010-1:2004

* These specifications are subject to change without notice.



ALL-TEST Pro, LLC

P.O Box 1139

Old Saybrook, CT 06475

Tel 860-399-4222

Fax 860-399-3180

Email info@alltestpro.com

Web www.alltestpro.com

Represented by: